
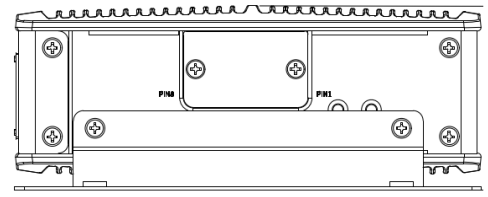


VES31-4S

4 + 2 Gigabit Ethernet Switch with 4-Port PoE

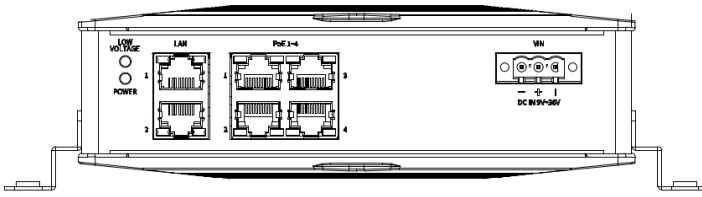

Main Features

- 4 x 10/100/1000 Mbps PoE (802.3af/at compliance)
- 30W at 48VDC for each PoE port
- Low battery voltage protection
- CE/FCC, UKCA, E13 mark certification
- Wide power input range 9 ~ 36VDC
- -40 ~ 75°C operating temperature
- Ignition power on/off support
- Power on/off delay time setting

Product Overview

VES31-4S mobile PoE switch is designed for telematics applications in harsh environments with fanless enclosure. It provides 6 Giga bit Fast Ethernet ports including 4 IEEE 802.3af/at compliance PoE ports to transfer large amounts of video streaming, voice and critical data across Ethernet network smoothly and quickly.

As the power source from a vehicle is unstable by nature, the mobile PoE switches support a wide voltage input range of 9VDC to 36VDC and provide smart power management with low battery voltage protection, power-on and power-off delay timer, and auto ignition power on/off functions. These unique features can secure reliable operation and prevent premature failure of both the PoE switches and vehicle.

VES31-4S is encased in a fanless dustproof enclosure and can operate under shock, vibration, and temperature extremes from -40 to 75°C. The mobile PoE switches are also small in size and support din rail mounting for ease of installation with PD devices such as IP cameras and Wi-Fi access points.

Specifications

Architecture

- Switch architecture. Highly integrated, unmanaged-smart gigabit, store and forward switch
- 4K entry MAC address table with automatic learning and aging

Power over Ethernet

- PoE standard IEEE 802.3af/at Power over Ethernet/PSE
- PoE power supply type end-span
- PoE power output per port 48V DC, 600mA. max. 30 watts

Network Connector

- 4-port RJ45 for 10/100/1000 base-T. PoE IEEE 802.3af/at compliance, total 120W
- 2-port RJ45 for 10/100/1000 base-T

Standard Compliance

- IEEE 802.3 for 10BaseT Ethernet
- IEEE 802.3u for 100BaseT(X) Fast Ethernet
- IEEE 802.3ab for 1000BaseT(X) Gigabit Ethernet
- IEEE 802.3x for flow control
- IEEE 802.3af/at Power Over Ethernet

I/O Interface

- Power: 1 x 9~36VDC input with ignition
- Ethernet
 - 4 x RJ45 10/100/1000 Mbps PoE port, 802.3af/at compliance
 - 2 x RJ45 10/100/1000 Mbps
- LED
 - 1 x power indicator
 - 8 x LINK/ACTIVE indicator
 - 4 x PoE indicator
 - 1 x low voltage protection indicator


Power Management

- Selectable boot-up & shut-down voltage for low power protection by DIP switch
- Power on/ off delay time setting by DIP switch

Dimensions

- 167 x 51.49 x 139.6 mm
- Weight: 1kg
- Support Horizontal Mounting, DIN- Rail Mounting (option) and vertical Mounting (option)

Dimension Drawing

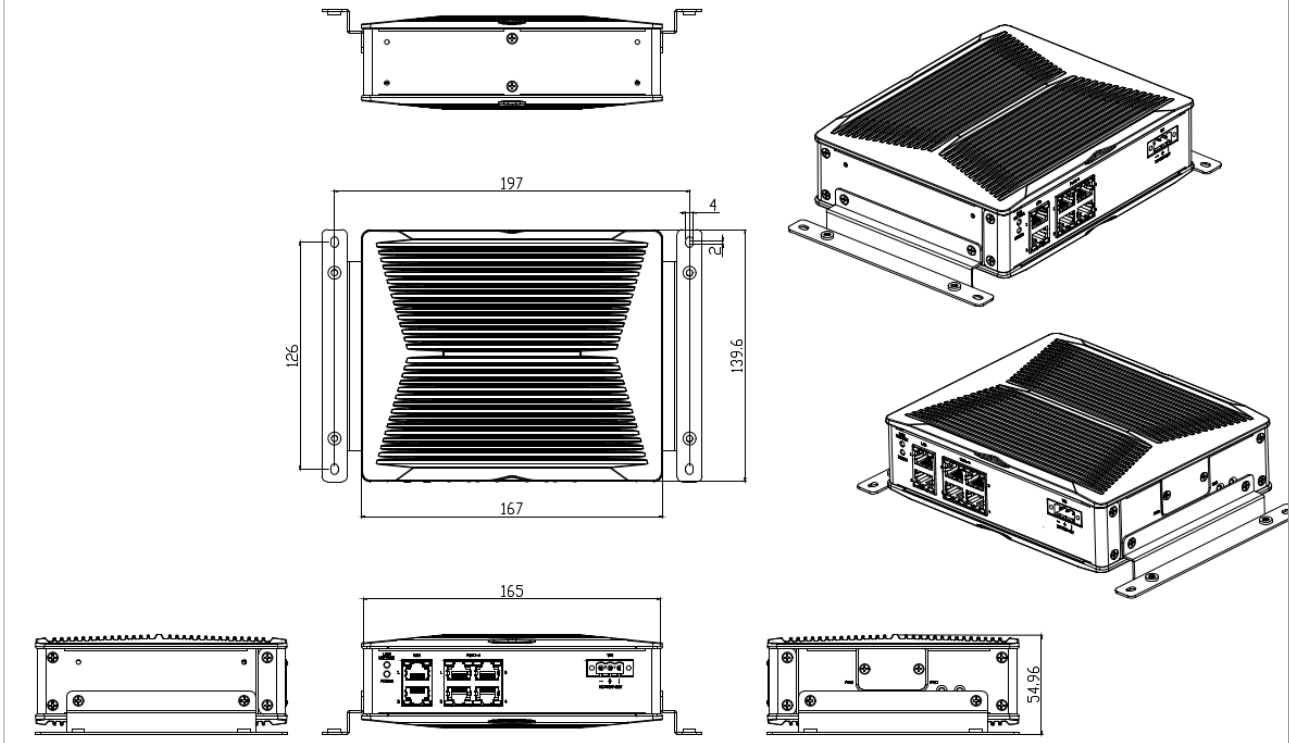

Environment

- Operating temperatures: Ambient with air -40°C to 75°C
- Storage temperatures: -35°C to 85°C
- Relative humidity: 10% to 90% (non-condensing)
- Vibration (random): 1g@5~500 Hz
- Vibration:
 - Operating: MIL-STD-810H, Method 514.8, Category 4, common carrier US highway truck vibration exposure
 - Storage: MIL-STD-810H, Method 514.8, Category 24, minimum integrity test
- Shock:
 - Operating: MIL-STD-810H, Method 516.8, Procedure I, functional shock=40g
 - Non-Operating: MIL-STD-810G, Method 516.6, Procedure V, crash hazard shock test=75g

Standards/Certifications

- CE approval
- FCC Class B
- E13 Mark
- UKCA

Ordering Information

- **VES31-4S (P/N: TBD)**
 4 x RJ45 10/100/1000 PoE port (802.3af/at), 2 x RJ45 10/100/1000 Ethernet port, 9 ~ 36VDC input, ignition detection, low voltage protection, delay timer, E13 mark