




## ZX10-EX FULLY RUGGED TABLET

- ATEX & IECEx Zone 2/22 explosive atmosphere certified
- Qualcomm® Snapdragon™ 660, Octa-core Processor
- 10.1" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Verified as Android enterprise recommended <sup>viii</sup>

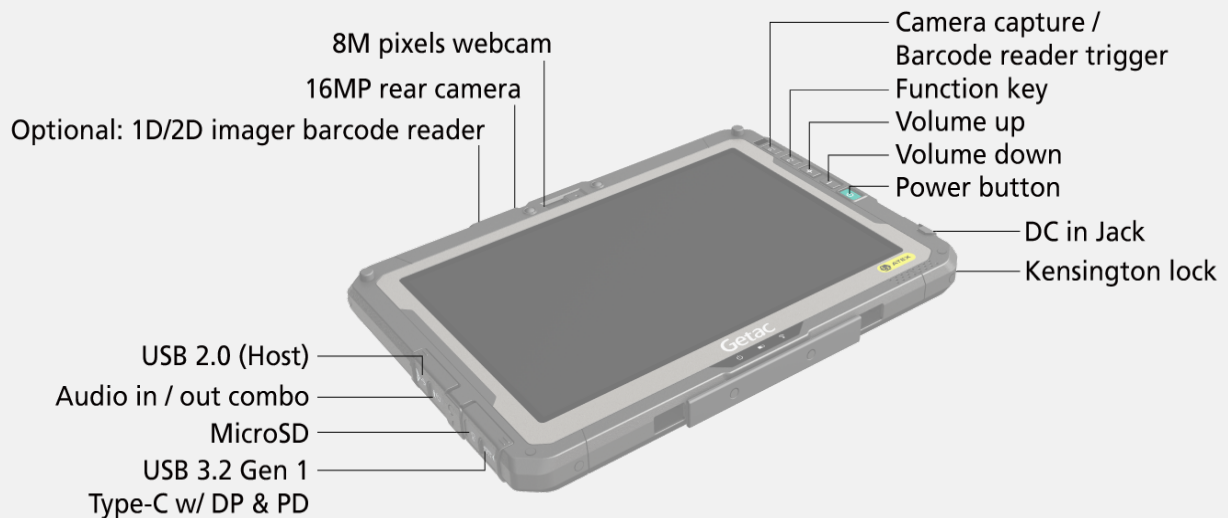

# SPECIFICATIONS

## Operating System

Android™ 12.0

## Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core  
1.95GHz  
Max. 2.2GHz

## VGA Controller

Qualcomm® Adreno™ 512 GPU

## Display

10.1" TFT LCD WUXGA (1920 x 1200)  
Protection film  
800 nits LumiBond display with Getac sunlight readable technology  
Capacitive multi-touch screen

## Storage & Memory

4GB LPDDR4, 64GB eMMC  
Optional: 6GB LPDDR4, 128GB eMMC

## Device Button

Power button  
4 tablet programmable buttons

## Pointing Device

Touchscreen  
- Capacitive multi-touch screen

## Expansion Slot

Optional: 1D/2D imager barcode reader  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader <sup>i</sup>

## I/O Interface

8M pixels webcam x 1  
16M pixels auto focus rear camera x 1  
Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 1 Type-C w/ DP & PD x 1  
USB 2.0 (Host) x 1  
MicroSD x 1

## Communication Interface

Wi-Fi 802.11 a/b/g/n/ac  
Bluetooth (v5.0) <sup>ii</sup>  
Dual Micro SIM  
Dedicated GPS  
Optional: 4G LTE mobile broadband

## Security Feature

Kensington lock  
Optional: HF RFID/NFC combo reader <sup>i</sup>  
Optional: Smart card reader

## Power

AC adapter (65W, 100-240VAC, 50/60Hz)  
Li-Ion smart battery (3.84V, typical 4990mAh;  
min. 4870mAh) x 2  
Optional: High capacity battery (3.84V, typical  
9980mAh; min. 9470mAh) x 2

## Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")  
1.09kg (2.40lbs) <sup>iii</sup>

## Rugged Feature

MIL-STD-810H certified  
IP66 certified  
Vibration & 6 feet (1.8m) drop resistant  
ATEX & IECEx certified

## Environmental Specification

Temperature <sup>iv</sup>:  
- Operating: -21°C to 55°C / -5.8°F to 131°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

## Explosion Protection

ATEX/IECEx Zone 2/22  
Ex II 3G Ex ic op is IIC T4 Gc  
Ex II 3D Ex ic op is IIIC T130°C Dc

## Pre-installed software

Getac Camera  
Getac Input Method  
Getac Driving Safety Utility (trial version)  
Getac deployXpress (trial version)  
Getac settings and Google applications (Search,  
Chrome, Gmail, Maps, YouTube, Play, Drive,  
YouTube music, Google TV, Duo and photos)  
Getac enrollXpress

## Optional software

Getac Driving Safety Utility  
Getac deployXpress  
Getac OEMConfig

## Accessories

Battery (3.84V, typical 4990mAh; min.  
4870mAh)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Capacitive hard tip stylus & tether

## Optional:

Carry bag  
Battery (3.84V, typical 4990mAh; min.  
4870mAh)  
High capacity Li-ion battery (3.84V, typical  
9980mAh; min. 9470mAh)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
100W Type-C AC adapter  
Protection film  
Rotating hand strap with kickstand  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
Capacitive hard tip stylus & tether  
Hard handle <sup>v</sup>

## Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

## Standard

3 years Bumper-to-Bumper

# ZX10-EX FULLY RUGGED TABLET

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Factory option. Not user-swappable.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

# Getac

Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,  
Shropshire TF3 3BJ, United Kingdom Tel :  
+44 (0) 1952 207 222 Sales-Getac-  
UK@getac.com | www.getac.com/en/  
Copyright © 2023 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only, available specification shall be subjected to  
quotation by request.