



- Qualcomm[®] Snapdragon™ 660, Octa-core Processor
- Verified as Android enterprise recommended in
- 7" LumiBond® display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP67 certified
- Optional barcode reader, RFID reader
- ATEX & IECEx explosive atmosphere certified














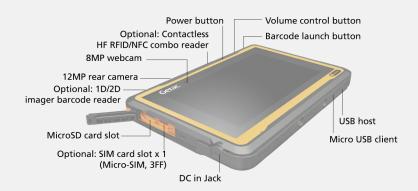

SPECIFICATIONS

Operating System	Android™ 10.0
Mobile Computing Platform	Qualcomm [®] Snapdragon™ 660, Octa-core 1.95GHz Max. 2.2GHz
VGA Controller	Qualcomm [®] Adreno™ 512 GPU
Display	7" IPS TFT LCD HD (1280 x 720) Anti-static protection film LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen
Storage & Memory	4GB LPDDR4 64GB eMMC
Keyboard	Power button 3 tablet programmable buttons
Pointing Device	Touchscreen - Capacitive multi-touch screen
Expansion Slot	Optional: 1D/2D imager barcode reader
I/O Interface	8M pixels webcam x 1 12M pixels auto focus rear camera x 1 DC in Jack x 1 USB 2.0 (Host) x 1 MicroUSB 2.0 (Client) x 1 MicroSD x 1 Optional: SIM card slot x 1 (Micro-SIM, 3FF)
Communication Interface	Wi-Fi 802.11ac Bluetooth (v5.0) ^{II} Dedicated GPS Optional 4G LTE mobile broadband ^{III}

Pre-installed Software Getac File Browser

Getac Camera Getac Input Method DeployeXpress Client

Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, Play music, Play movies,

Duo and photos)

Security Features Optional: HF RFID/NFC combo reader iv, v

Power AC adapter (25W, 100-240VAC, 50/60Hz)

Li-ion battery (3.8V, typical 8480mAh; min. 8220mAh)

Dimension (W x D x H) & Weight 218 x 142 x 27mm (8.58 " x 5.6" x 1.08")

774g (1.71lbs) vi

Rugged Features MIL-STD-810H certified

IP67 certified

Vibration & 6ft (1.8m) drop resistant vii

ATEX & IECEx certified

Environmental SpecificationsTemperature viii:

- Operating: -21°C to 60° C / -6°F to 140° F

- Storage: -40°C to 71°C / -40°F to 160°F

Humidity:

- 95% RH, non-condensing

Explosion Protection ATEX/IECEx Zone 2/22

Ex II 3G Ex ic op is IIC T5 Gc Ex II 3D Ex ic op is IIIB T100°C Dc

Accessories AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)

Capacitive stylus with tether

Pen holder Wrist strap

Optional:

AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)

Capacitive stylus with tether Hand strap with stylus holder

Wrist strap

Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users.
 Google and Android are trademarks of Google LLC.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Units with 4G LTE option comes with an embedded SIM card slot.
- IV. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- V. HF RFID/NFC combo reader applies to US & EU.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac (UK) Ltd.

Getac House, Stafford Park 12,
Telford, Shropshire TF3 3BJ, United Kingdom
Tel: +44 (0) 1952 207 222
Sales-Getac-UK@getac.com I www.getac.com/en/
Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference only,
available specification shall be subjected to quotation by request. V01M09Y21WW

